
Fiche technique / Datasheet

Numéro d'article / Article number: 54100

Numéro EAN / EAN number: 4250384778910
Catégorie de fret / Freight category: B

Bac de rétention type S230

Drip tray type S230

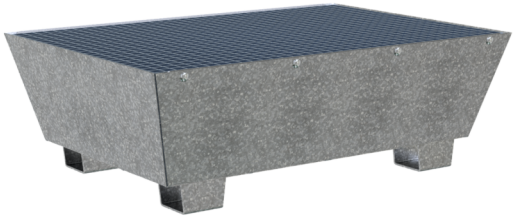

Description de l’article

Bac de rétention type S230

Bac de rétention type S230, , construction particulièrement compacte et peu encombrante, construction soudée en acier, sûr et durable, avec caillebotis galvanisé à chaud amovible comme plan de pose sous le bac pour le transport à l‘intérieur de l‘entreprise, volume de rétention 230 l, dimensions extérieures: 1230 x 850 x 400 mm, hauteur de chargement: 400 mm, surface de chargement: 1230 x 850 mm, galvanisé

Item description

Drip tray type S230

Drip tray type S230

·compact, space-saving design
·welded steel construction
·safe and durable
·with removable hot-dip galvanized grating
·as a positioning level can be driven under for internal transport
·collection capacity 230 liters
·external dimensions: 1230 x 850 x 400 mm
·loading height: 400 mm
·loading area: 1230 x 850 mm
·galvanized

Technical specifications

Weight: kg
Dimensions: 684 mm x 1059 mm x 402 mm
Material:
S235 JR

Surface finish:
Hot-dip galvanised in accordance with DIN ISO 1461

* Toutes les données sont des valeurs indicatives (en partie avec les arrondis habituels dans la branche pour une meilleure compréhension) et servent uniquement à la compréhension du produit, mais pas comme base pour la construction d'accessoires, de supports de stockage, d'adaptations, de produits combinés ou autres. Toutes les indications sont fournies sans garantie, nous déclinons toute responsabilité pour d'éventuelles erreurs et les conséquences qui en résultent.
* All data are approximate values (partly with industry-standard rounding for better understanding) and serve only for product understanding, but not as a basis for the design of accessories, storage solutions, adaptations, combination products or the like. All information is without guarantee, for possible errors and resulting consequences we assume no responsibility.

Schake GmbH · www.schake.com · info@schake.com · +49 (0) 23 31 / 3 86 06 - 0