Datasheet / Datenblatt


Article number / Artikelnummer: 11789

EAN number / EAN: 4250384701536
Freight category / Frachtkategorie: B

Slanted prop, painted, Adjusting range 150 cm - 261 cm

Schrägstütze, lackiert, Verstellbereich 150 cm - 261 cm



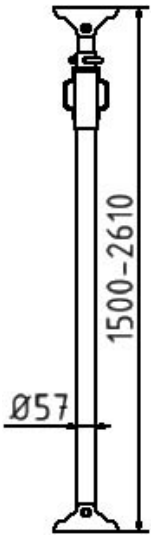

Item description

Slanted prop

Slanted prop with inner thread, pivot joint at both ends

Slanted props
as tensile or compression props for versatile application on construction sites, for example:
, Propping different types of system formwork
, Adjusting and propping prefabricated concrete parts, particularly hollow walls and or triple sheeting walls
, Propping column or pillar formwork

The advantages at a glance:
, Suitable for tensile as well as compressive force
, Rough setting by safety pins
, Fine adjustment by protected inner thread
, Movable joints for any slanted or angular position
, Suitable for impact wrenches
, Safety pin to prevent accidental coming out of the pin during concreting or adjusting operations

- painted
- Adjusting range 150 cm - 261 cm

Artikeltext

Schrägstütze

· mit Innengewinde, beidseitig mit Endgelenk

Anwendungsbeispiele als Zug- und Druckstützen für die vielseitigsten Einsätze im Baustellenalltag, beispielsweise zum:
· Abstützen von diversen Systemschalungen
· Einjustieren und Abstützen von Betonfertigteilen, insbesondere von Hohl- oder 3-Schalenwänden
· Stützen von Säulenschalrohren oder Stützenschalungen

Vorteile:
· Belastbar auf Zug und Druck
· Grobeinstellung mittels Sicherheitsabsteckbolzen
· Feinjustierung mittels geschütztem Innengewinde
· Raumbewegliche Gelenke für jede Schräg- und Winkellage
· Für Schlagschraubgeräte geeignet
· Sicherheitsabsteckbolzen gegen unbeabsichtigtes Lösen des Absteckbolzens bei Betonage bzw. Justierarbeiten

- lackiert
- Verstellbereich 150 cm - 261 cm

* All data are approximate values (partly with industry-standard rounding for better understanding) and serve only for product understanding, but not as a basis for the design of accessories, storage solutions, adaptations, combination products or the like. All information is without guarantee, for possible errors and resulting consequences we assume no responsibility.
* Alle Angaben sind Richtwerte (teilweise mit branchenüblichen Rundungen zum besseren Verständnis) und dienen leidglich zum Produktverständnis, nicht aber als Basis zum Bau von Zubehörteilen, Lagergestellen, Adaptierungen, Kombinationsprodukten oä. Alle Angaben sind ohne Gewähr, für evtl. Fehler und resultierende Folgen übernehmen wir keine Verantwortung.

Technical specifications

Weight: 15,9 kg
Dimensions: 200 mm x 1620 mm x 100 mm
material:
S235 JR

finish:
red painted

Technische Daten

Gewicht: 15,9 kg
Abmessungen: 200 mm x 1620 mm x 100 mm
Material:
S235 JR

Ausführung:
rot lackiert

* All data are approximate values (partly with industry-standard rounding for better understanding) and serve only for product understanding, but not as a basis for the design of accessories, storage solutions, adaptations, combination products or the like. All information is without guarantee, for possible errors and resulting consequences we assume no responsibility.
* Alle Angaben sind Richtwerte (teilweise mit branchenüblichen Rundungen zum besseren Verständnis) und dienen leidglich zum Produktverständnis, nicht aber als Basis zum Bau von Zubehörteilen, Lagergestellen, Adaptierungen, Kombinationsprodukten oä. Alle Angaben sind ohne Gewähr, für evtl. Fehler und resultierende Folgen übernehmen wir keine Verantwortung.