





Numéro d'article / Article number: **3B2036M**

Numéro EAN / EAN number: 4250384734565
Catégorie de fret / Freight category: C

Clôture mobile "Profi M", sans crochets et œillets

Mobile fence "Profi M", without hook and eye

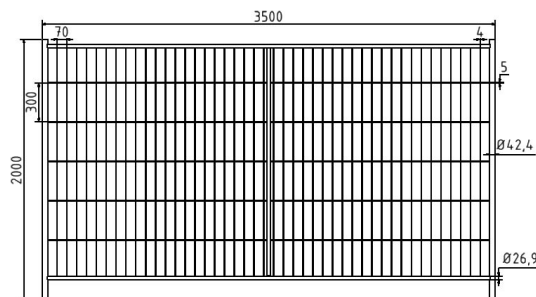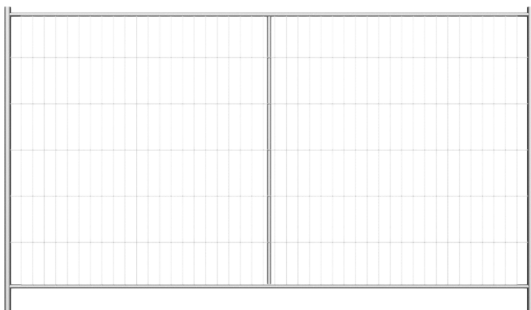

Description de l'article

Clôture mobile "Profi M"

Clôture mobile "Profi M", galvanisée à chaud, avec cadre tubulaire périphérique, tubes verticaux Ø 42,4 mm, tubes horizontaux Ø 26,9 mm, maillage vertical 100 mm / horizontal 300 mm, épaisseur des fils verticaux 4 mm / horizontaux 5 mm, Fils: vertical 44 pcs. / horizontal 7 pcs., un longeron vertical est soudé au milieu pour une stabilité supplémentaire, largeur : 3,50 m, hauteur : 2,00 m

- sans crochets et œillets

Item description

Mobile fence "Profi M"

Mobile fence "Profi M"

- hot-dip galvanised
- with all-round tubular frame
- standing tubes Ø 42.4 mm
- horizontal tubes Ø 26.9 mm
- mesh width: vertical 100 mm / horizontal 300 mm
- wire thickness vertical 4 mm / horizontal 5 mm
- wires vertical 44 pcs. / horizontal 7 pcs.
- for additional stability a vertical spar is welded in the middle
- width: 3.50 m
- height: 2.00 m

- without hook and eye

Données techniques

Poids: 26,88 kg
Dimensions: 2000 mm x 3500 mm x 42 mm
matériau:
S235 JR

largeur: 3,50 m, hauteur: 2,00 m

surface:
galvanisé à chaud suivant DIN ISO 1461

Technical specifications

Weight: 26,88 kg
Dimensions: 2000 mm x 3500 mm x 42 mm
material:
S235 JR

dimensions: width: 3,50 m, height: 2,00 m

surface:
hot dipped galvanized acc. to DIN ISO 1461

* Toutes les données sont des valeurs indicatives (en partie avec les arrondis habituels dans la branche pour une meilleure compréhension) et servent uniquement à la compréhension du produit, mais pas comme base pour la construction d'accessoires, de supports de stockage, d'adaptations, de produits combinés ou autres. Toutes les indications sont fournies sans garantie, nous déclinons toute responsabilité pour d'éventuelles erreurs et les conséquences qui en résultent.

* All data are approximate values (partly with industry-standard rounding for better understanding) and serve only for product understanding, but not as a basis for the design of accessories, storage solutions, adaptations, combination products or the like. All information is without guarantee, for possible errors and resulting consequences we assume no responsibility.